


ISUZU INDUSTRIAL DIESEL OPEN POWER UNIT

38.9 HP to 362 HP

Models: 3CE1 to 6UZ1

POWERED BY:

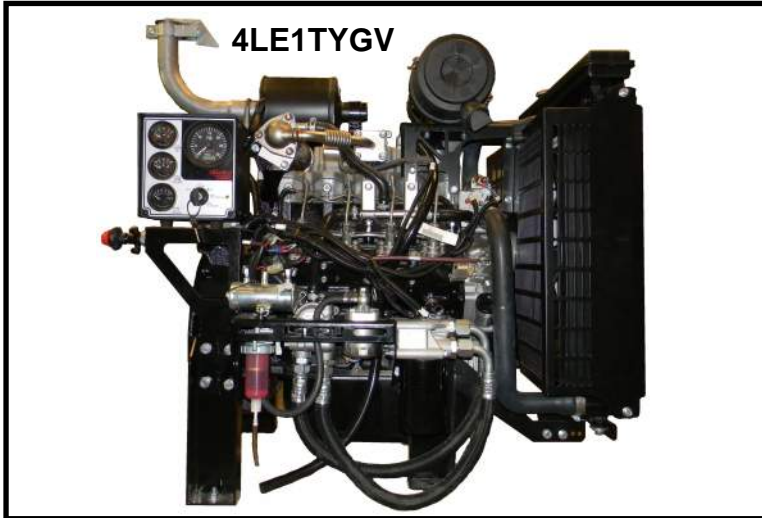

Power Unit Specifications

- Isuzu Diesel Variable Speed Engine
- Isuzu Control Panel with Key Switch
- Safety Shutdown System (Low Oil Pressure & High Coolant Temperature)
- Fan Guard
- Radiator
- Exhaust Muffler
- Industrial Air Cleaner
- Engine Support Legs
- Steel Skid
- Throttle
- Oil and Fuel Filters
- 12 OR 24 Volt Electrics
- Owner's Manual
- 2 Year 2,000 Hour Engine Warranty OR
*5 Year 5,000 Hour MCW

ENGINE HORSE POWER @ RPM RATING		
Engine	Max Hp	Max RPM
3CE1BDZP	38.9	3000
4LE1NYBW	50	2600
4LE1TYBW	62	2500
4JJ1XYBW	134	2500
4HK1XYBW	203	2100
6HK1XYBW	293	2000
6UZ1XYBW	362	1950

Contact M&L Engine for Specific Warranty Details



M&L Engine, LLC

1212 Saint Charles St. Houma, LA 70360
(985) 857-8000 ♦ (800) 960-0068

www.mlengine.com email: sales@mlengine.com

Engine Specifications

Manufacturer	Isuzu
Cylinder Arrangement	3, 4 or 6 in-line 4 cycle
Horse Power at Rated RPM (bhp)	Variable
Governor Type	Mechanical / Electrical
Frequency Regulation	3-5%
Air Cleaner	Replaceable Element

Standard Panels

Isuzu Light Panel (A)



Isuzu Deluxe Control Panel (B)



Isuzu Power View Panel (C)



Optional Panels

Murphy Gauge Panel



Remote Panel




Murphy Auto Start Panel



Optional Accessories

- Racor Fuel / Water Separator
- Battery
- Battery Charger
- ESD Air Shut Down Valve
- 6' Manual Cable for ESD Valve
- Oil Drain Valve
- Spark Arrestor
- Air Starter
- Bearing Supported Stub Shaft
- Hydraulic Pump Adapter
- Mainline Breaker
- Fuel Tank
- Murphy Gauge Panel
 - Tachometer
 - Optional Sealed Fiberglass Box
- Remote Panel
- Murphy Auto Start Panel Includes 10' Wire Harness with Optional Accessories:
 - 15 Watt Solar Panel
 - 24 Volt Battery Charged
 - Mechanical Float Switch
- Custom Length Wire Harness Extension
- Welded Steel Skid
- PTO
- Aluminum Enclosure
- Contact us for custom accessory options

Engine	Control Panel	EPA Tier	SAE Bellhousing / Flywheel	Weight lbs.	Dimensions in Inches		
					A	B	C
3CE1BDZP	A	Tier 4 Interim	SAE 5 / 7.5"	502	29	21	30
4LE1NYBW	A	Tier 4 Interim	SAE 4 / 10" or SAE 5 / 7.5"	536	43	25	32
4LE1TYBW	B	Tier 4 Interim	SAE 4 / 10"	676	42	23	43
4JJ1XYBW	C	Industrial Tier 3	SAE 3 / 11.5"	1268	53	36	56
4HK1XYBW	C	Industrial Tier 3	SAE 3 / 11.5"	1698	63	43	50
6HK1XYBW	C	Industrial Tier 3	SAE 2 / 11.5"	2284	88	58	71
6UZ1XYBW	C	Industrial Tier 3	SAE 1 / 14"	3600	76	58	73

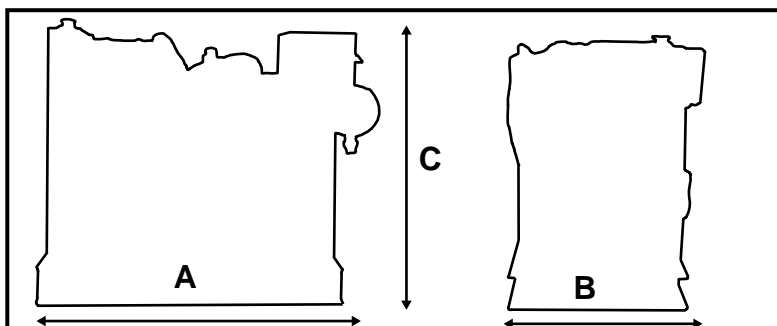

M&L Engine, LLC

1212 Saint Charles St. Houma, LA 70360
(985) 857-8000 ♦ (800) 960-0068

www.mlengine.com email: sales@mlengine.com