

NET INTERMITTENT POWER Potencia Neta Intermitente	54.7 hp 40.8 kW
RATED SPEED Velocidad de Regimen	1800 RPM

4TNV98-ZGGE


SPECIFICATION Especificacion	ZGGE
CYLINDERS Cilindros	4
BORE X STROKE Diámetro x Carrera	3.9 X 4.3 (in) 98 X 110 (mm)
DISPLACEMENT Cilindrada	202.5 (ci) 3319 (cc)

Dimensions & Performance Data & Quick Specs	Length / Longitud	30.04 in (763 mm)
	Width / Ancho	21.65 in (550 mm)
	Height / Altura	29.21 in (742 mm)
	Dry Weight / Peso en seco	540 lbs / 245 kg

COMBUSTION TYPE Tipo de Combustion	Direct Injection Inyeccion Directa
--	---------------------------------------

ASPIRATION Aspiracion	Naturally Aspirated Aspiracion Natural
---------------------------------	---

GOVERNOR TYPE Tipo de Gobernador	Electric Electrico
--	-----------------------

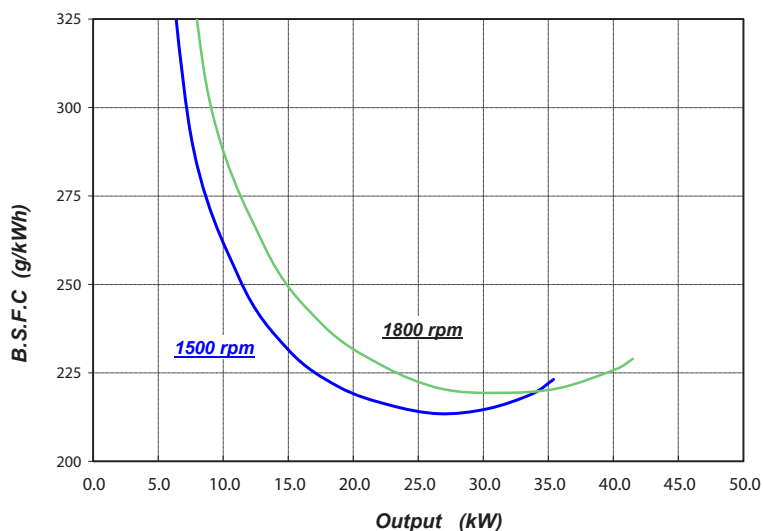

Reliable & Durable

The TNV engines now proudly take up the running as Yanmar's premium small industrial diesel. They offer even more enhanced durability due to better block cooling, a stiffer crank and pistons, finer tolerance in the journal and more. CAE analysis has brought lower vibrations and higher strength to the mounting structure for even better reliability in heavy-duty jobs.



Clean Emissions

Building off the proven TNE design, Yanmar has achieved superior exhaust emissions by improving the combustion chamber and fuel injection equipment design. Engines are compliant with Interim Tier 4 and EU stage III A exhaust emissions regulations.



Fuel Delivery and Economy

A newly designed, Distributor-Type MP4 Fuel Injection Pump is utilized to assure more precise fuel delivery and control. The result is reduced emissions, improved performance over a wide range of applications and increased fuel economy which assures that Yanmar's reputation for superior starting characteristics continues.

Lubrication System

10.5L Capacity Deep Oil Pan

Electrical System

12V, 40 Amp Alternator

Fuel System

Distributor-Type MP4 Fuel Injection Pump

Cooling System

Water Pump, Belt Driven

Power Take Off

FWH-SAE #3 t=125
FW-SAE 11.5" CMP